


GT40P6L

145 Wp - 155 Wp

Solar modules glass - transparent foil

Real World Tested • Globally Trusted

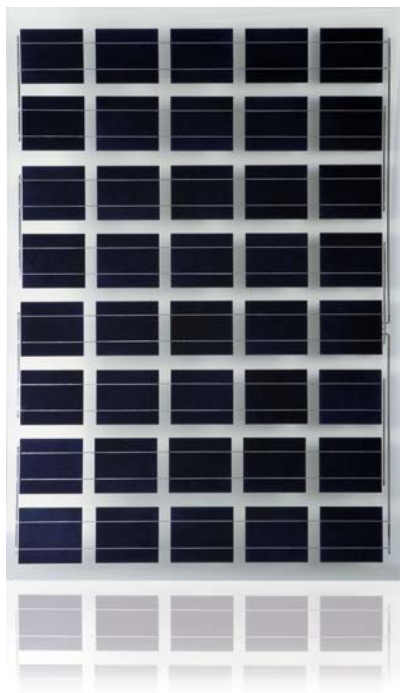

- Excellent Power Tolerance +3/0 %
- 10 Year Limited Warranty Product
- 25 Year Power Output Warranty
- Modules with Efficiency up to 10,3%

Why Siliken?


- Our global success has established a solid foundation to service the long-term needs of the solar industry.
- With over 200 MW installed worldwide, we have built a respected brand by consistently providing a quality product with proven performance.
- Our firm commitment to R&D allows us to reduce costs and permanently improve efficiency. What's more, it enables us to improve our existing products and develop new technologies in the renewable energy field.



Siliken Reliability

The high quality and reliability ensure the prompt return of investment for any PV installation.


Each module goes through its testing phases, including strict power production verification and resistance tests in radiation simulators. With innovative products and solutions successfully implemented around the world, Siliken is a recognized global leader in solar power.

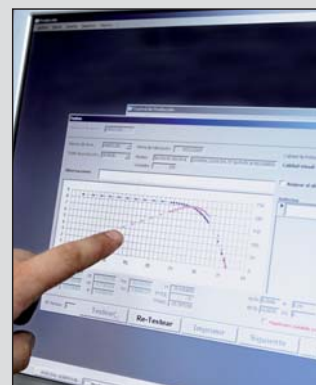

GT40P6L


145 Wp - 155 Wp

Solar modules glass - transparent foil

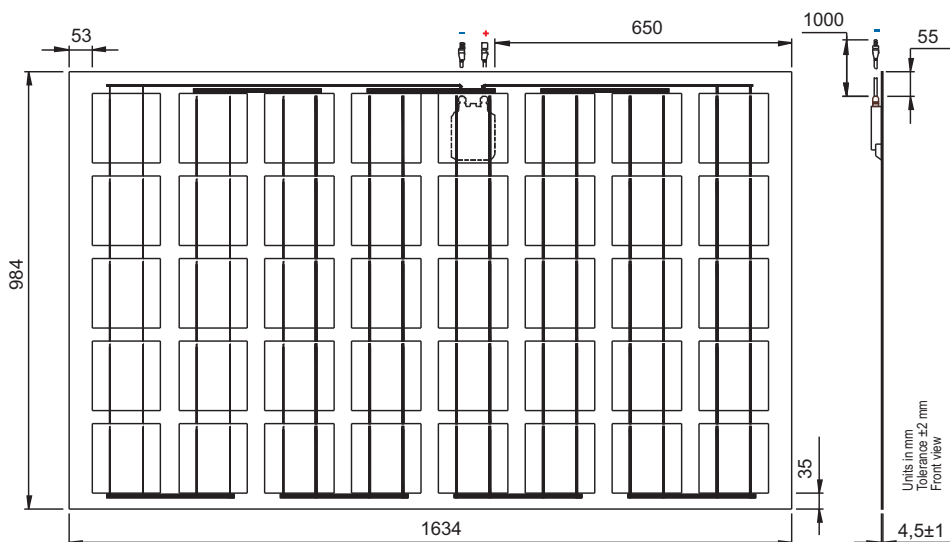


Constructive Characteristics


- 1 GLASS PLATE
- 2 AND 4 EVA
- 3 CELLS
- 5 BACKSIDE FOIL
- 6 JUNCTION BOX




GT40P6L - 155 Wp
I-V and Pmax characteristics with a variety of radiation levels at 25°C

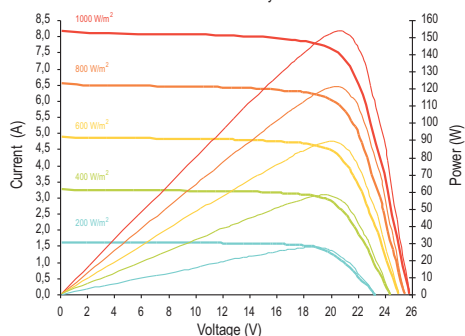

GT40P6L - 155 Wp
I-V characteristics with a variety of cell temperatures at 1.000 W/m²

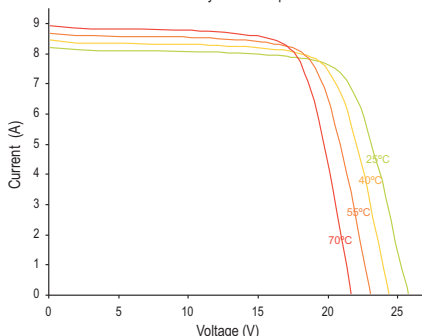

Weak light performance at Pmpp
— Siliken module's average

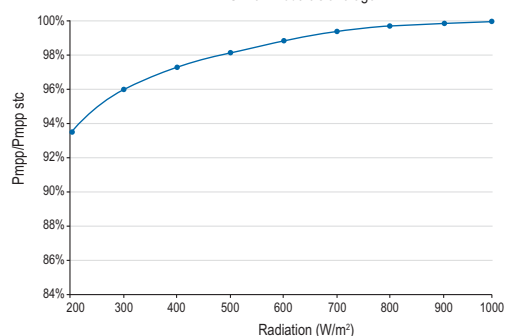

Mechanical Data

Dimensions (LxWxD)	1634 x 984 x 4,5 mm
Thickness (Junction Box included)	32,5 mm
Weight	17 kg
Output Cables	Symmetrical length cable 1 m Ø4 mm ² , doble insulation coating, halogen free, UV resistance
Junction Box	IP-65 rated with bypass diodes
Anchorage or installation	It has to be installed with the correct fixation elements for safety glass in the 4 edges or in the 2 long edges.
Front Glass	3,2 mm low iron tempered glass with high transmissivity
Backside Foil	Backside transparent foil
Solar Cells	40 Poli-crystalline cells 156 x 156 mm

Electrical Data

	P _{mp} (Wp)	145	150	155
Maximum power at STC (+3/0 %)	P _{mp} (Wp)	145	150	155
Voltage at Maximum Power	V _{mp} (V)	19,4	19,5	19,6
Current at Maximum Power	I _{mp} (A)	7,45	7,68	7,90
Open Circuit Voltage	V _{oc} (V)	24,4	24,6	24,6
Short Circuit Current	I _{sc} (A)	8,06	8,20	8,40
Efficiency at STC	η (%)	9,64	9,98	10,32
Fill Factor	FF	0,735	0,742	0,749
Temperature Coefficient of Pmp	T _k P _{mp} (%/°C)		-0,43	
Temperature Coefficient of Voc	T _k V _{oc} (%/°C)		-0,356	
Temperature Coefficient of Isc	T _k I _{sc} (%/°C)		+0,062	
Normal Operating Cell Temperature	NOCT (°C)		49±2	

Values at Standard Test Conditions STC: Irradiance 1.000 W/m², Air Mass AM 1,5 and cell temperature 25°C

Certifications

ISO 9001:2000	Nº ES08 / 5170
ISO 14001	Nº ES09 / 6520

Tested Operating Conditions

Temperature	-40 °C a +85 °C
Static Load	2400 Pa
Max Load	5400 Pa
Impact Resistance	Hailstone Impact Ø25mm at 23m/s
Thermal transmission coefficient	5,62 (W/m ² K)
Transparency	40%

Warranty

- 25 year limited warranty of 80% output power
- 10 year limited warranty of 90% output power
- 10 year limited warranty of materials and workmanship

MANUFACTURED IN SPAIN BY

Siliken Modules, S.L.U.
C/ Massamagrell, 40 • Pol. Ind. L'Horteta.
46138 Rafelbunyol - Valencia - Spain.
Phone: (+34) 902 41 22 33 - Fax: (+34) 96 141 05 14 • www.siliken-modules.com

A SILIKEN GROUP COMPANY

Siliken S.A.
Ronda Isaac Peral y Caballero, 14. Parque Tecnológico.
46980 Paterna - Valencia - Spain.
Phone: (+34) 902 41 22 33 - Fax: (+34) 96 070 92 65 • www.siliken.com

WARNING: Read the instruction manual carefully before using this product
NOTE: Siliken Modules, S.L.U. reserves the right to modify this product without prior notice

You will find a digital version of this data sheet at www.siliken.com
We have printed this for our customers on paper that guarantees the smallest environmental impact, and that has obtained the following ecological certifications:

